

Cyber Ends

FEATURES:

Special Bolts (Titanium)
Safety Plug Ends (Derlin CNC)
Destination: Cross Country only.

COMPATIBILITY:

Standard \varnothing 22.2 mm handlebar.
Handlebar must be bar end compatible.


INSTALLATION:

For your safety follow all these instruction rules:

- 1) The ends must be mounted pointed forward (never toward the rider).
Installation angle 0° - 30° compared to orizontal. (See fig 1).
- 2) Bar ends have to be carefully positioned to avoid entangling object while riding (see fig 2).

WARNINGS:

For safety reasons use only original special bolts.
Maximum tightening torque 3-4 Nm (Lubed).
Bar ends may often damage carbon handlebars in case of accident.

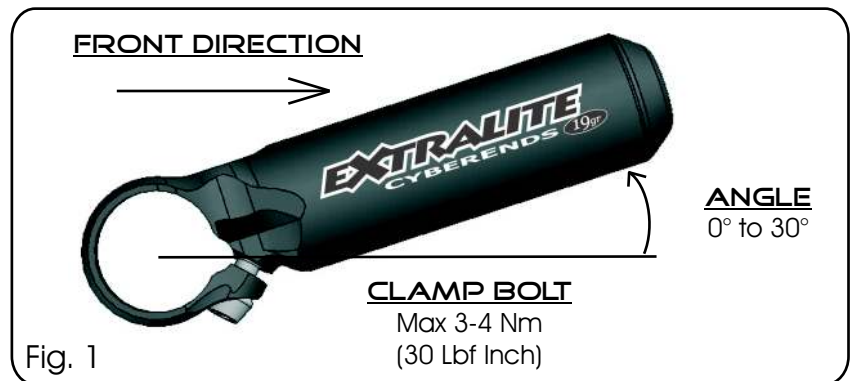

Studio Riva S.r.l. - Tel: ++39 0371 203059
info@extralite.com - www.extralite.com

