

Aliens 4

FEATURES:

Front Hub: 100mm - Rear Hub: 130/135mm.
Aerospace Titanium GRD5 Triple Butted Rods, 3D CNC
levers, self adjusting plates.
Maximum dropout thickness: 8.5mm

DESTINATION: Road & X-Country.

INSTALLATION:

- 1) Remove the Adjusting Nut.
- 2) Slide the skewer through the hollow axle of the hub.
- 3) Re-attach the Adjusting Nut.
- 4) With the correct clamping force achieved (about 8kg, 18Lb), move the lever to the CLOSE position.

MAINTENANCE:


Periodically and after washing lube with oil between Lever,
Lever Nut and Lever Pivot contact areas.

WARNING:

An excessive closing pressure can damage this component and hub. A lower closing
pressure can cause wheel detachment.

Maximum dropout thickness: 8.5mm on 135mm frames.

Levers have to be carefully positioned to avoid entangling objects while riding.

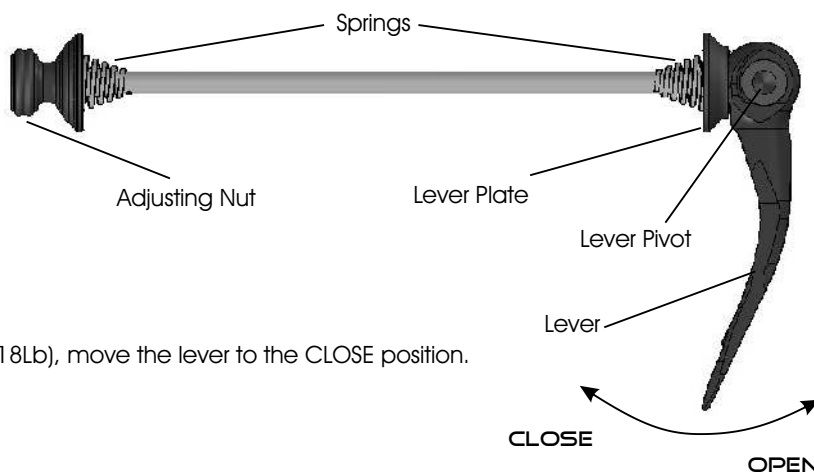

Studio Riva S.r.l. - Tel: ++39 0371 203059
info@extralite.com

EXTRALITE